




DVR Card

DV-HC-DS4016HCI

2CIF Real Time Recording Main Features

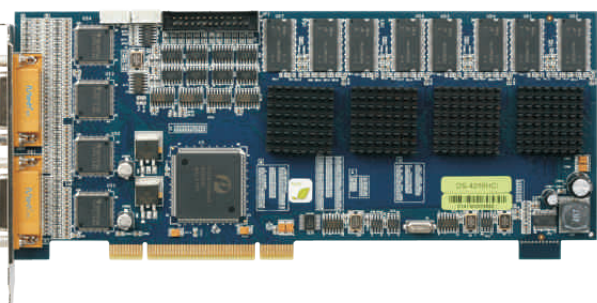

HIKVISION

H.264 hardware compression

D1 maximum resolution

Stack up to 64 channels

Hybrid with IP camera

High video quality


iPhone Blackberry, PDA

LOW CPU occupancy

Less storage usage

Support Windows 2000/XP/2003/Vista/7

DVR Server Function Diagram

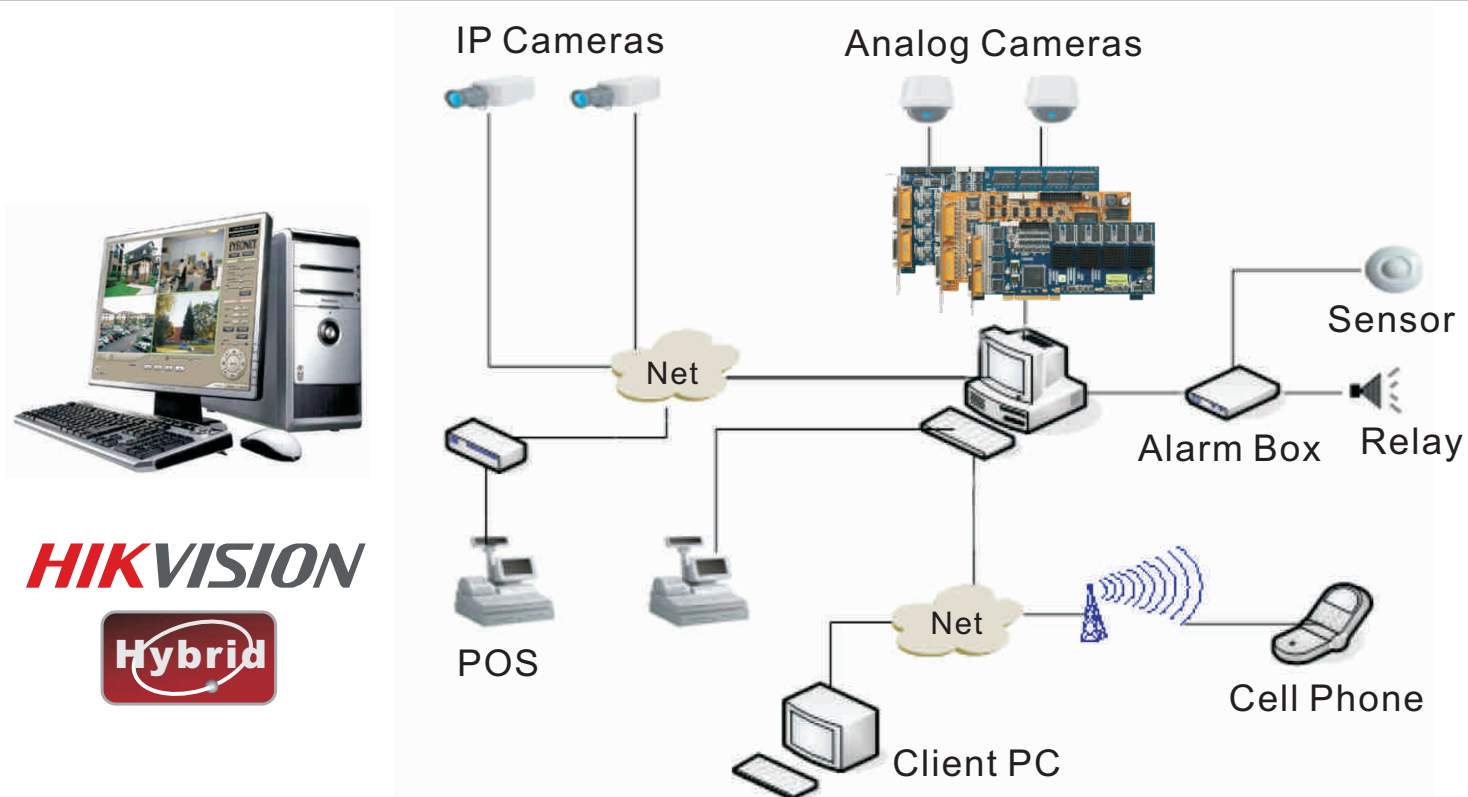

HIKVISION
Hybrid

Video/Audio Input	
Video Input	16ch
Video Input Interface	BNC (1.0Vp-p, 75Ω)
Audio Input	16ch
Audio Input Interface	BNC (2.0Vp-p, 1kΩ)
Video/Audio Output	
Video Compression	H.264
Audio Compression	OggVorbis, 16Kbps
VGA Display	4CIF: 25fps(PAL)/30fps(NTSC)
Encode Resolution	4CIF/DCIF/2CIF/CIF/QCIF
Recording/Playback	4CIF: 10-12fps DCIF: 20-22fps 2CIF/CIF: 25(P)/30(N)fps
Dual Stream	Yes
Bit Rate	32Kbps~2Mbps Per Channel
General	
Power Consumption	<22w
Operating Temperature	-10°C~ 50°C
Humidity	10% ~ 90%
Dimensions	250mmx106mm
System Requirement	
OS	Windows 2000 / XP / 2003 / Vista / 7
CPU	Intel series
Motherboard	Based on Intel 845 / 865 / 915 / 925 / 945 / 965 / Core2 / Core4 Chipset
Memory	256MB or above
Display Adapter	Display Adapter Driver Must Support BLT.